

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 393 967
A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 90304060.8

(51) Int. Cl.⁵: G02F 1/137

(22) Date of filing: 17.04.90

(30) Priority: 17.04.89 US 339281

(43) Date of publication of application:
24.10.90 Bulletin 90/43(64) Designated Contracting States:
DE FR GB NL

(71) Applicant: **TEKTRONIX, INC.**
Howard Vollum Park 14150 S.W. Karl Braun
Drive P.O. Box 500
Beaverton Oregon 97077(US)

(72) Inventor: **Rumbaugh, Scott, H.**
19419 SW Tualamere
Lake Oswego, Oregon 97035(US)
Inventor: **Jones, Michael D.**
4429 SW Tunnelwood
Portland, Oregon 97221(US)
Inventor: **Bos, Philip J.**
15550 NW Perimeter Place
Beaverton, Oregon 97006(US)

(74) Representative: **Bryer, Kenneth Robert et al**
Hepworth, Lawrence & Bryer 2nd Floor, Gate
House South Westgate Road
Harlow Essex CM20 1JN(GB)

(54) Polarization controller for use in optical fiber communication system.

(57) A state-of-polarization (SOP) control system (10) uses a SOP controller (28) that is responsive to a CPU (24) to perform endless and complete polarization signal detection for a fiber optic communication system. The SOP controller (28) comprises liquid crystal variable optical retarders (40, 42, and 44) that adjust the polarization state of local optical signal (36) in response to voltages provided by the CPU (24). The CPU (24) adjusts the voltage applied to the retarders (40, 42, and 44) separately in response to the magnitude of an interference signal (70), which corresponds to the degree to which the polarization of the local optical signal (36) and an input optical signal (12) are different.

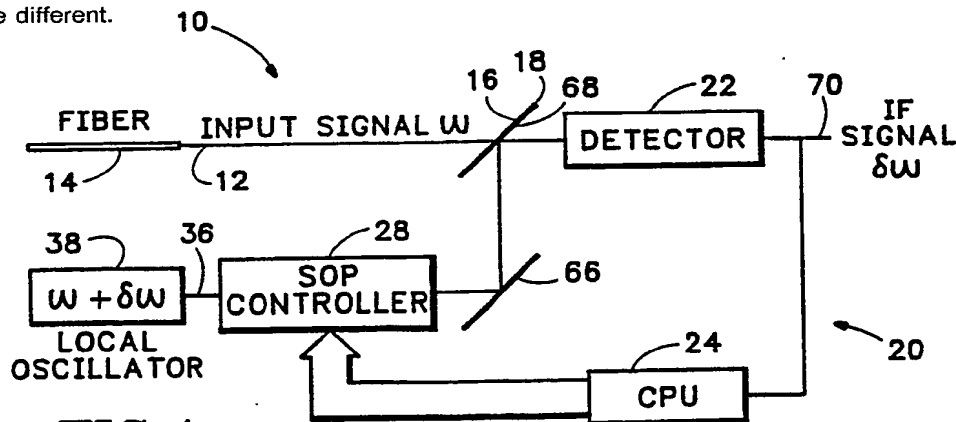


FIG.1

POLARIZATION CONTROLLER FOR USE IN OPTICAL FIBER COMMUNICATION SYSTEM

Technical Field

The present invention relates to optical communication systems and, in particular, to a polarization controller comprising multiple liquid crystal devices to provide endless polarization control in the coherent
 5 detection of an optical signal propagating through an optical communication system.

Background of the Invention

10 State-of-polarization control systems have applications with fiber sensors, interferometry and optical communications systems. The following background information is presented herein only by way of example with reference to a polarization controller for use in an optical fiber communication system.

One type of conventional optical fiber communication system employs a single-mode fiber that transmits a light beam emitted by a narrow spectral linewidth semiconductor laser. An optical modulator
 15 modulates the light beam in accordance with an electrical message signal at baseband frequencies to form a modulated optical signal that propagates through the single-mode fiber. The polarization state of the modulated optical signal typically changes over time at the communication system receiver as a result of thermal or mechanical disturbances or stresses undergone by the fiber or as a result of inherent birefringence of the fiber. For example, a linearly polarized transmitted optical signal typically becomes
 20 generally elliptically polarized by the time it reaches the receiver. Such changes in polarization state require compensation to enable the use of a coherent detection receiver. The cost and drawbacks of using conventional polarization-maintaining fiber preclude its use in practical communication systems and plain coherent detection schemes. However, the polarization state of a signal in a single-mode fiber varies slowly enough to permit polarization compensation.

25 A state-of-polarization matching scheme may be implemented in a variety of ways and can be incorporated into existing fiber optic networks. Two basic approaches for controlling the polarization state of a signal are (1) matching the polarization state of a locally generated signal with that of the received communication signal and (2) separately detecting the two orthogonal polarization components of the received communication signal and adding them together after appropriate polarization compensation.

30 Combinations of these approaches generally employ two or more controlling elements to compensate for the number of degrees freedom of a polarization state, i.e., the ellipticity and tilt angle. The controlling elements previously employed in polarization controllers include electromagnetic fiber squeezers, electrooptic crystals, rotatable fiber coils, rotatable quarter-wave and half-wave plates, Faraday rotators, and rotatable fiber cranks.

35 Each of these polarization controllers suffers from varying degrees of insertion loss, mechanical fatigue, and other disadvantages, which are more fully described by Okoshi, "Polarization-State Control Schemes for Heterodyne or Homodyne Optical Fiber Communications," Journal of Lightwave Technology, IEEE Vol. LT-3, No. 6, December, 1985. Other disadvantages associated with the polarization controllers are their high cost and need for high operating voltages.

40 Two polarization controllers that are capable of providing endless control are rotatable wave plates and rotatable fiber cranks. Endless control is important because the fluctuation of the polarization state of a signal in a single-mode fiber is unpredictable. Thus, a state-of-polarization control element having a limited control range might require resetting. The resetting in conventional systems is generally accompanied by loss of the polarization state of the local optical signal and a consequent loss of information because of an
 45 inability to maintain continuous coherent detection. This loss can be substantial if the polarization state of the received optical signal is near to or fluctuates about the critical range points of the polarization controller elements.

50

Summary of the Invention

An object of the present invention is, therefore, to provide a polarization state controller for use in a optical communication system employing coherent detection.

Another object of this invention is to provide such a polarization controller that is capable of endless

control.

A further object of this invention is to provide such a polarization controller that is relatively low cost and requires a relatively low operating voltage.

The present invention relates to a state-of-polarization control system for an optical system in which a detector develops a difference signal that is indicative of a difference between polarization states of an input optical signal and a local optical signal. The control system includes a polarization controller that controls the polarization of the local signal to control the difference in polarization between the local signal and input signal. The polarization controller includes first, second, and third liquid crystal devices that provide retardance values ψ_z , θ_p , and θ_y , respectively. A signal processor computes polarization data for the liquid crystal devices in response to the difference signal. The liquid crystal devices respond to the polarization data to minimize the difference between the polarization state of the input signal and local signal.

The control system operates in a normal mode and first and second reset modes. In normal mode, the first and second liquid crystal devices cooperate to change the polarization of the horizontally polarized local signal to any linear tilt polarization. In the normal mode, the third liquid crystal device provides any elliptical polarization state to the output of the second liquid crystal device. Further, the third liquid crystal device generally changes the tilt of the output of the second liquid crystal device. In the first and second reset modes, the third liquid crystal device is reset from an upper and lower limit, respectively, while the first and second liquid crystal devices provide an elliptical polarization state to the local signal. The control system is endless in that during reset modes no change occurs in the state-of-polarization of the local signal as it emerges from the third liquid crystal device. The tracking system of the present invention is explained with reference to the Poincare sphere.

Liquid crystal devices provide polarization control at a relatively low operating voltage and can be easily implemented in existing systems at a very low cost.

Additional objects and advantages of the present invention will be apparent from the following detailed description of a preferred embodiment thereof, which proceeds with reference to the accompanying drawings.

Brief Description of the Drawings

Fig. 1 is a system block diagram of a coherent detection receiver in which the polarization controller of the present invention minimizes the difference between an input optical signal and a locally generated optical source signal.

Fig. 2 is a diagram showing three liquid crystal cells forming a polarization controller that imparts a controlled amount of retardation to the locally generated signal to maintain coherent detection of the input signal.

Fig. 3 shows the Poincare sphere, which is useful for describing the operation of the polarization controller of the invention.

Figs. 4a and 4b through Figs. 8a and 8b show examples of polarization displacement paths of the locally generated optical signal on the surface of the Poincare sphere as the polarization controller functions to achieve a minimum polarization difference between the input and locally generated optical signals. Figs. 4a, 5a, 6a, 7a, and 8a show plan views of the Poincare sphere. Figs. 4b, 5b, 6b, 7b, and 8b show side views of the Poincare sphere.

Fig. 9 is a flowchart of the processing steps associated with the normal operating mode of the invention.

Fig. 10 is a flowchart of the processing steps associated with a first reset mode of the invention.

Fig. 11 is a flowchart of the processing steps associated with a second reset mode of the invention.

Detailed Description of Preferred Embodiment

Referring to Fig. 1, a preferred embodiment of a state-of-polarization (SOP) control system 10 forms a portion of an optical communication receiver that performs coherent detection of an input optical signal 12 propagating from the output end of an optical fiber 14. SOP control system 10 is of the heterodyne type. The present invention may be used in any system that uses interference, such as an interferometer system. A preferred embodiment includes a communication receiver.

The input signal 12 exits optical fiber 14 and strikes a surface 16 of a half-silvered mirror 18, which

functions as the input of a control loop 20. Control loop 20 includes a detector 22, a central processing unit (CPU) 24, and a SOP controller 28 that receives a local optical signal 36 from a local oscillator 38.

Input signal 12 has angular frequency ω and an arbitrary SOP. Local signal 36 has an angular frequency $\omega + \delta\omega$ and a nominally horizontal polarization. Alternatively, local signal 36 could be vertically polarized. The angular frequency $\delta\omega$ is defined as the offset frequency of the local signal 36 relative to the angular frequency ω of input signal 12.

Referring to Fig. 2, SOP controller 28 preferably includes three nematic liquid crystal variable optical retarders 40, 42, and 44 that are of the variable birefringent type. Local signal 36 propagates along optic axis 48, which intersects and is normal to the light communicating surfaces of retarders 40, 42, and 44. Points a, b, and c are used as reference points in describing the SOP of local signal 36 as it emerges from retarders 40, 42, and 44, respectively.

The relative alignment of fast axis 50, fast axis 52, and fast axis 54 is shown on retarders 40, 42, and 44, respectively. Alternatively, axes 50, 52, and 54 could be the slow axes of retarders 40, 42, and 44. Fast axes 50 and 54 are aligned 45° with respect to fast axis 52 and horizontally polarized local signal 36.

The retardance of liquid crystal retarders is a function of the alignment of the liquid crystal molecules, which is controlled by the intensity of an applied electric field. The retardance of retarder 40 is denominated ψ_z . The retardance of retarder 42 is denominated θ_p . The retardance of retarder 44 is denominated θ_y . The intensities of the electric fields applied to retarders 40, 42, and 44 change in response to voltage signals appearing at the respective outputs 60, 62, and 64 of CPU 24. Any combination of values of retardance ψ_z , θ_p , and θ_y may be obtained by varying the magnitudes of the applied voltage signals.

To achieve coherent detection of input signal 12, SOP control system 10 tracks the polarization of input signal 12 by changing the retardance imparted to local signal 36 by retarders 40, 42, and 44. The polarization of local signal 36 may be any desired value by producing a corresponding combination of retardances ψ_z , θ_p , and θ_y . This change in polarization of local signal 36 is achieved in the following manner.

Referring again to Fig. 1, local signal 36 propagates through SOP controller 28, reflects off a mirror 66, and strikes the surface 68 of half-silvered mirror 18. As an alternative to the configuration of Fig. 1, mirrors 18 and 66 could be replaced by a fiber optic directional coupler. Input signal 12 propagates through mirror 18, and local signal 36 reflects off mirror 18. Both input signal 12 and local signal 36 strike detector 22, which is preferably a photo-detector. Photo-detectors are inherently square law devices such that the only time-varying signal detected is the interference (IF) signal 70 of frequency $\delta\omega$. The amplitude of IF signal 70 is determined by the amplitude of local signal 36 and how closely the polarization of local signal 36 matches the polarization of input signal 12. The amplitude of IF signal 70 increases as the polarization difference between input signal 12 and local signal 36 decreases.

SOP controller 28 minimizes the polarization difference between input signal 12 and local signal 36 by systematically varying the SOP of local signal 36 until the voltage of IF signal 70 is a maximum. Once the voltage of IF signal 70 is a maximum, SOP controller 10 continues to vary the SOP of local signal 36 to follow changes in input signal 12.

SOP control system 10 continuously modifies the SOP of local signal 36 to minimize the difference between the SOP of input signal 12 and local signal 36. Changes in the amplitude of IF signal 70 are the only feedback used to determine how to modify the SOP of local signal 36. SOP control system 10 is complete in that SOP controller 28 can produce all possible polarization states in local signal 36 as it emerges from retarder 44 at point c. SOP control system 10 is endless in that no change in the SOP at point c occurs during the reset of any of finite range retarders 40, 42, and 44.

The method of varying the polarization of local signal 36 may be explained in connection with the Poincare sphere 80, which is shown in Fig. 3. Referring to Fig. 3, the Poincare sphere 80 is a unit-radius spherical surface on which each point represents a different polarization form. Every point on the equator 82 represents linear polarization in a different polarization direction. Point H on the equator represents horizontally polarized light, and point V, which is diametrically opposed to point H, represents vertically polarized light. Elliptical polarization is represented by any point on the sphere located off the equator 82. The north pole and south pole represent right-circular (RC) and left-circular (LC) polarization, respectively. The Poincare Sphere is described in W. A. Shurcliff and S. S. Ballard, Polarized Light, 1964, pp. 71-76, and Born & Wolf, Principles of Optics, 1980, section 1.4, p. 31. In Fig. 3, the $z - z^*$, $\psi_z - \psi_z^*$, and $\theta_p - \theta_p^*$ axes are perpendicular to each other. The symbol * denominates a conjugate, i.e., an orthogonal counterpart. For example, z^* is a conjugate of z . The $\theta_y - \theta_y^*$ axis is collinear with the $\psi_z - \psi_z^*$ axis.

The Jones vector E_c , which describes the SOP of the electric field of local signal 36 at point c, is determined by multiplying the Jones vector of the SOP of local signal 36 as it emerges from local oscillator 38 by the Jones matrices for each device in an order opposite to that in which they appear in the system. E_c is described with linear algebraic matrix multiplication in equation 1 below:

$$\begin{aligned}
 \vec{E}_c &= \begin{vmatrix} \cos(\theta_y/2) & i\sin(\theta_y/2) \\ i\sin(\theta_y/2) & \cos(\theta_y/2) \end{vmatrix} \begin{vmatrix} e^{i\theta_p/2} & 0 \\ 0 & e^{-i\theta_p/2} \end{vmatrix} \\
 &\quad \begin{vmatrix} \cos(\psi_z/2) & i\sin(\psi_z/2) \\ i\sin(\psi_z/2) & \cos(\psi_z/2) \end{vmatrix} \begin{vmatrix} 1 \\ 0 \end{vmatrix} \\
 &= \begin{vmatrix} \cos P \cos(Z + Y) + i\sin P \cos(Z - Y) \\ \sin P \sin(Z - Y) + i\cos P \sin(Z + Y) \end{vmatrix} \quad (1)
 \end{aligned}$$

where $P = \theta_p/2$, $Y = \theta_y/2$, and $Z = \psi_z/2$.

Jones vectors and Jones calculus are described in W. A. Shurcliff, Polarized Light: Production and Use, 1966, pp. 23-29, 91, and 118-123, and W. A. Shurcliff and S. S. Ballard, Polarized Light, 1964, pp. 80-82 and 93-95.

Three control algorithms (normal mode and two reset modes) are used to endlessly maintain the polarization match between input signal 12 and local signal 36, and determine the values of ψ_z , θ_p , and θ_y to use in equation (1). Equation (1) may be used to explicitly determine the polarization state at point c. Determining the polarization state at point c is not necessary in using the invention. CPU 24 calculates voltages in the manner described in connection with the flowcharts of Figs. 9, 10, and 11.

Normal Mode of Operation

Under normal operation of a preferred embodiment, $\theta_p = \pm\pi/2$, which is an illustrative case of $(4n \pm 1)\pi/2$ where n is any integer. Liquid devices do not switch between positive and negative values of retardance. However, $\pi/2$ is a special case of $(4n + 1)\pi/2$ and $-\pi/2$ is a special case of $(4n - 1)\pi/2$. The use of $\pm\pi/2$ is for mathematical simplicity. When the invention is implemented with liquid crystals, other values such as $\theta_p = \pi/2$ and $3\pi/2$ are preferred. The polarization matching is accomplished by altering ψ_z and θ_y . Since their axes 50 and 52 are displaced by 45° , retarders 40 and 42 operate as a single unit that effectively rotates the SOP of local signal 36 as it propagates between local oscillator 38 and point b. This changes the SOP in rotational directions about the $z - z^*$ axis of the Poincare sphere 80. Retarders 40 and 42 are referred to as the rotator analog. Retarder 44 controls the ellipticity and additional tilt of local signal 36 by changing the SOP in rotational directions about the $\theta_y - \theta_y^*$ axis on the Poincare sphere 80.

The Jones vector for local signal 36 exiting retarder 42 at point b in Fig. 2 is described with linear algebraic matrix multiplication in equation (2) below:

$$\begin{aligned}
 \vec{E}_b &= \begin{vmatrix} e^{i\theta_p/2} & 0 \\ 0 & e^{-i\theta_p/2} \end{vmatrix} \begin{vmatrix} \cos(\psi_z/2) & i\sin(\psi_z/2) \\ i\sin(\psi_z/2) & \cos(\psi_z/2) \end{vmatrix} \begin{vmatrix} 1 \\ 0 \end{vmatrix} \\
 &= e^{i\theta_p/2} \begin{vmatrix} \cos(\psi_z/2) \\ e^{i(\pi/2 - \theta_p)} \sin(\psi_z/2) \end{vmatrix}, \quad (2)
 \end{aligned}$$

where \vec{E}_b represents the electric field vector of local signal 36 at point b. The $e^{i\theta_p/2}$ term is an absolute phase term that has no effect on the polarization and will be disregarded. For $\theta_p = \pi/2$, the Jones vector at point b is described in equation (3) below:

$$\vec{E}_b = \begin{bmatrix} \cos(\psi_z/2) \\ \sin(\psi_z/2) \end{bmatrix}. \quad (3)$$

For $\theta_p = -\pi/2$, the Jones vector at point b is described in equation (4) below:

$$\vec{E}_b = \begin{bmatrix} \cos(\psi_z/2) \\ -\sin(\psi_z/2) \end{bmatrix}. \quad (4)$$

Equations (3) and (4) above indicate, therefore, that restricting the voltage signal at output 62 of CPU 24 to binary values corresponding to retardation values of $\theta_p = \pm\pi/2$, provides a linear SOP at point b. Under these conditions, the value of ψ_z determines the polarization direction or tilt of local signal 36 exiting retarder 44. Whenever $\psi_z = n\pi$, where n is any integer, the polarization at point a matches one of the two eigenstates of θ_p , which are linear polarizations in the same plane as the fast and slow axes of retarder 42. In the case where $\psi_z = n\pi$, changes in θ_p have no effect on the SOP of local signal 36 at point b.

The polarization tilt at point b may be rotated endlessly and continuously if the direction of control of ψ_z is reversed at its range limit (0 or π) and θ_p is switched to its complementary value. The range limits may be defined as $n\pi$ and $(n+1)\pi$ where n is any integer. In a preferred embodiment, 0 and π are chosen as range limits for illustrative purposes. During normal operation, therefore, the combination of retarders 40 and 42 function as a polarization rotator with infinite range. The polarization tilt at point b is $\psi_z/2$ for $\theta_p = \pi/2$, and $-\psi_z/2$ for $\theta_p = -\pi/2$. The combination of retarders 40 and 42 together with retarder 44 provide complete control of the polarization so that any SOP of local signal 36 can be produced at the output of SOP controller 28.

During the normal mode of operation, SOP control system 10 maximizes the voltage of IF signal 70 by minimizing the polarization difference between input signal 12 and local signal 36. The SOP of input signal 12 typically changes extremely slowly relative to the rate at which the SOP of local signal 36 may be changed by CPU 24.

In a preferred embodiment, the polarization difference of input signal 12 and local signal 36 is minimized in the following manner. The SOP of local signal 36 can be represented by a point at a particular location on the Poincare sphere 80. A change in location on the Poincare sphere 80 corresponds to a change in the SOP of local signal 36. The SOP of input signal 12 is represented on the Poincare sphere 80 as a single point. The voltage signals provided at outputs 60 and 62 of CPU 24 change the retardation amounts of the respective retarders 40 and 42 and thereby change the position of the SOP of local signal 36 by incremental amounts on the Poincare sphere 80. During normal mode, the voltage on output 62 is either one of two voltage corresponding to $\theta_p = \pm\pi/2$.

If this change in SOP results in an increase in the magnitude of IF signal 70, then the change took place in the correct direction on the Poincare sphere 80. If this change in SOP results in a decrease in the magnitude of IF signal 70, then the position of the SOP of local signal 36 should be moved in the opposite direction. The position is incrementally changed until a change results in a decrease in the magnitude of IF signal 70. The position is then changed by one increment point in the opposite direction. In a preferred embodiment, CPU 22 alternates changes in the control voltages on outputs 60 and 64 in order to track the SOP of input signal 12. The control voltage on output 62 is either one of two voltages corresponding to $\theta_p = \pm\pi/2$ in order to maintain endless rotation of the linear polarization at point b.

The voltage signal provided at output 64 of CPU 24 changes the retardation amount of retarder 44 and thereby changes the position of the SOP of local signal 36 by incremental amounts on the Poincare sphere 80. The direction of change in retardation of retarder 44 remains the same as long as the magnitude of IF signal 70 increases as a result of the change. If a change in the position results in a decrease in the magnitude of IF signal 70, then the position is changed in the opposite direction.

An example of the operation of SOP control system 10 is shown in connection with Figs. 4a and 4b through Figs. 8a and 8b. Figs. 4a, 5a, 6a, 7a, and 8a show a plan view of the Poincare sphere 80 at times t_0 to t_4 . Figs. 4b, 5b, 6b, 7b, and 8b show a side view of the Poincare sphere at time t_0 to t_4 . Point LO indicates the SOP of local signal 36 as it enters retarder 40. Symbols a, b, and c indicate the SOP of local signal 36 at points a, b, and c in Fig. 2. Dashed lines indicate the SOP of local signal 36 as it propagates from local oscillator 38 to point c in Fig. 2. The dashed lines are slightly displaced from their

actual position for clarity of illustration. The SOP of input signal 12 is indicated at point "Input SOP." Points on the front side of the sphere are darkened while points on back side are shown as circles.

Table 1 shows the values of ψ_z , θ_p , and θ_y for times t_0 to t_4 and whether IF signal 70 increased or decreased as a result of a change in the SOP of local signal 36. The symbols "inc_z" and "inc_y" represent increments to the retardation of retarders 40 and 44, respectively. The initial conditions of ψ_z , θ_p , and θ_y are arbitrary chosen to be $\pi/2$.

Table 1

Time	ψ_z	θ_p	θ_y	IF signal
t_0	$\pi/2$	$\pi/2$	$\pi/2$	---
t_1	$\pi/2 + \text{inc}_z$	$\pi/2$	$\pi/2$	Decrease
t_2	$\pi/2 - \text{inc}_z$	$\pi/2$	$\pi/2$	Increase
t_3	$\pi/2 - \text{inc}_z$	$\pi/2$	$\pi/2 + \text{inc}_y$	Increase
t_4	$\pi/2 - 2(\text{inc}_z)$	$\pi/2$	$\pi/2 + \text{inc}_y$	Increase

Referring to Fig. 4a, at time t_0 , the SOP of local signal 36 is horizontally polarized at point LO as local signal 36 enters retarder 40. The SOP of local signal 36 at points a, b, and c is shown on Fig. 4a. Fig. 4b shows the SOP of local signal 36 at time t_0 at point LO and points a, b, and c in a side view on the Poincare sphere 80.

Referring to Figs. 5a and 5b, at time t_1 , the electric field across retarder 40 is incrementally changed such that ψ_z increases from $\pi/2$ to $\pi/2 + \text{inc}_z$. The resulting changes in SOP are shown at points a, b, and c in the plan view Fig. 5a and side view of Fig. 5b. Point c is on the back side of the sphere in Fig. 5a. The increment in ψ_z resulted in a decrease in the magnitude of IF signal 70 since point c in Figs. 5a and 5b is farther from point Input SOP than it was in Figs. 4a and 4b. Therefore, ψ_z should have been decremented rather than incremented.

Referring to Figs. 6a and 6b, ψ_z is decremented from $\pi/2$ to $\pi/2 - \text{inc}_z$. The resulting changes in the SOP at points a, b, and c are shown at time t_2 in the plan view of Fig. 6a and the side view of Fig. 6b. Since point c in Figs. 6a and 6b is closer to point Input SOP than it was in Figs. 4a and 4b, the change in ψ_z was in the correct direction.

Referring to Figs. 7a and 7b, at time t_3 , θ_y is incremented from $\pi/2$ to $\pi/2 + \text{inc}_y$. The resulting changes in the SOP at points a, b, and c are shown at time t_3 in the plan view of Fig. 7a and the side view of Fig. 7b. Since point c in Figs. 7a and 7b is closer to point Input SOP than it was in Fig. 6a and 6b, the change in θ_y was in the correct direction.

Referring to Figs. 8a and 8b, at time t_4 , ψ_z is decremented from $\pi/2 - \text{inc}_z$ to $\pi/2 - 2(\text{inc}_z)$. The resulting change in the SOP at points a, b, and c are shown at time t_4 in the plan view of Fig. 8a and the side view of Fig. 8b. Point c is very close to point Input SOP. The polarization difference in local signal 36 and input signal 12 is minimized, causing IF signal 70 to be maximized.

SOP control system 10 will continue to either the values of ψ_z and θ_y to follow changes in the SOP of input signal 12. The value of θ_p is changed to its complimentary value according to the algorithm of Fig. 9. To the extent the SOP of input signal 12 remains constant over time after the difference in polarization is minimized, SOP control system 10 alters ψ_z , θ_p , and θ_y in a predictable manner, such that there can be a determinable difference between the SOP of input signal 12 and the SOP of local signal 36.

In the foregoing example, SOP control system 10 took four time periods to track point Input SOP. In practice, the incremental values are preferably so small (e.g., $\pi/50$) that it would take many more time periods to track point Input SOP. The dashed lines on Figs. 4a and 4b through Figs. 8a and 8b do not show exact incremental values, but rather are intended to be merely illustrative.

Fig. 9 shows a flowchart of the operation of SOP control system 10 in the normal mode of operation. The operation starts at start box 150. CPU 24 has no information concerning the direction in which the SOP of local signal 36 should be changed. The initial values of ψ_z , θ_p , and θ_y are arbitrarily chosen to be $\pi/2$, as is represented in operation box 154.

Operation box 158 represents an incremental change in ψ_z such that $\psi_z = \psi_z + \text{inc}_z$ (using computer language representation). Decision box 162 represents a determination of whether $0 < \psi_z < \pi$. In practice, ψ_z will not go outside of the range $0 < \psi_z < \pi$, since as soon as ψ_z would reach 0 or π , the value of θ_p is changed to $-\theta_p$ and the direction of change in ψ_z is switched. For example, if ψ_z is increasing toward π , just as it reaches π , ψ_z begins to decrease in value. If the answer to decision box 162 is negative, then $\theta_p = -\theta_p$.

and $\text{inc}_z = -\text{inc}_z$, as is represented in operation box 166. The choice of $0 < \psi_z < \pi$ is arbitrary. It could have been any interval of π with boundaries defined as $n\pi$ and $(n + 1)\pi$ where n is any integer.

Decision box 170 represents a determination of whether the change in ψ_z resulted in an increase in the magnitude of IF signal 70. If the answer to decision box 170 is negative, then $\psi_z = \psi_z - 2(\text{inc}_z)$ and $\text{inc}_z = -\text{inc}_z$, as is represented in operation box 174, and control is returned to decision box 162.

The polarization is then changed such that $\theta_y = \theta_y + \text{inc}_y$, as represented in operation box 178. It is then determined whether $0 < \theta_y < \pi$, as is represented in decision box 182. Again, $0 < \theta_y < \pi$ could be replaced by any interval of π with boundaries defined as $n\pi$ and $(n + 1)\pi$ where n is any integer. If the answer to decision box 182 is negative, then one of two reset modes are selected, depending on whether θ_y is at an upper or lower boundary, as is represented in operation box 186. The reset modes are described in connection with Figs. 10 and 11.

Decision box 190 represents a determination of whether the modification to θ_y results in an increase in the magnitude of IF signal 70. If the answer to decision box 190 is negative, then $\theta_y = \theta_y - 2(\text{inc}_y)$ and $\text{inc}_y = -\text{inc}_y$, as is represented in operation box 194 and control is returned to decision box 182. SOP control system 10 then increments ψ_z again, as is represented in operation box 158, and SOP control system 10 follows the flowchart of Fig. 9.

Reset Modes

The rotator analog has infinite range and under normal operation requires no reset. The retardation value θ_y will, however, periodically reach either an upper or a lower range limit. If these limits are set to integral multiples of π , then θ_y may be increased or decreased by π , and the output polarization will be unchanged if retarders 40 and 42 are controlled appropriately. During this reset cycle, retarders 40 and 42 will no longer function as a rotator and the polarization at point b in Fig. 2 will not be linear. For clarity of illustration the upper and lower limits are chosen to be π and 0.

The reset conditions are derived by assuming a constant polarization as determined by equation (1). When θ_y reaches its upper range limit of π , the SOP of local signal 36 is maintained while θ_y is set back to 0 if θ_p and ψ_z obey equations (5) and (6) below:

$$\theta_p = \theta_{p0} - M \cos^{-1}(\sin \psi_{z0} / \sin \psi_z) \quad (5)$$

where $M = 1$ for $0 \leq \psi_{z0} < \pi/2$ and $\theta_{p0} = \pi/2$, or $\pi/2 \leq \psi_{z0} \leq \pi$ and $\theta_{p0} = -\pi/2$; and

$M = -1$ for $\pi/2 \leq \psi_{z0} \leq \pi$ and $\theta_{p0} = \pi/2$, or $0 \leq \psi_{z0} < \pi/2$ and $\theta_{p0} = -\pi/2$,

where ψ_{z0} and θ_{p0} are initial values of ψ_z and θ_p .

$$\theta_y = \pi - \cos^{-1}(\cos \psi_z / \cos \psi_{z0}) \quad (6)$$

where θ_{p0} and ψ_{z0} are the initial values of θ_p and ψ_z .

When the reset cycle is complete, $\theta_p = \theta_{p0}$, $\psi_z = \pi - \psi_{z0}$, $\theta_y = 0$ and normal operation is resumed.

The values of θ_p and ψ_z are determined by equations (7) and (8) when θ_y reaches its lower range limit of 0.

$$\theta_p = \theta_{p0} + M \cos^{-1}(\sin \psi_{z0} / \sin \psi_z) \quad (7)$$

where M is determined as it was in equation (5).

$$\theta_y = \cos^{-1}(\cos \psi_z / \cos \psi_{z0}) \quad (8)$$

Although range limits of θ_y and ψ_z are chosen to be 0 and π , the analysis may be easily extended for any limits which are integral multiples of π . This control algorithm is general and will work with any system of linearly birefringent devices.

Fig. 10 shows a flowchart of the operation of SOP control system 10 in upper reset mode in which θ_y is reset from the upper limit, $\theta_y = \pi$. Upper reset mode starts at start box 220. Operation box 224 represents the assignment of values: $\psi_{z0} = \psi_z$, $\theta_{p0} = \theta_p$, $M_a = \text{sgn}(\cos \psi_{z0})$, and $M_b = \text{sgn}(\sin \theta_{p0})$.

Operation box 240 represents the assignment of value: $\psi_z = \psi_z + M_a \text{inc}_z$, where inc_z is a positive increment. Operation box 244 represents the assignment of value: $\theta_p = \theta_{p0} - M_a M_b \cos^{-1}(\sin \psi_{z0} / \sin \psi_z)$. Operation box 248 represents the assignment of value: $\theta_y = \pi - \cos^{-1}(\cos \psi_z / \cos \psi_{z0})$. Decision box 252 represents a determination of whether $\pi - \psi_{z0} - \text{inc}_z < \psi_z < \pi - \psi_{z0} + \text{inc}_z$. If the answer to decision box 252 is affirmative, SOP control system 10 returns to normal mode, as is represented in operation box 256. If the answer to decision box 252 is negative, SOP control system 10 changes the value of ψ_z , as is represented in operation box 240 and proceeds through upper reset mode as shown in the flowchart of Fig. 10.

Fig. 11 shows a flowchart of the lower reset mode in which θ_y is reset from the lower limit, $\theta_y = 0$. Lower reset mode starts at start box 270. Operation box 274 represents the assignment of values: $\psi_{z0} = \psi_z$, $\theta_{p0} = \theta_p$, $M_a = \text{sgn}(\cos \psi_{z0})$, and $M_b = \text{sgn}(\sin \theta_{p0})$.

Operation box 290 represents the assignment of value: $\psi_z = \psi_z + M_a \text{inc}_z$. Operation box 294 represents the assignment of value: $\theta_p = \theta_{p0} + M_a M_b \cos^{-1}(\sin \psi_{z0} / \sin \psi_z)$. Operation box 298 represents the assignment of value: $\theta_y = \cos^{-1}(\cos \psi_z / \cos \psi_{z0})$. Decision box 302 represents the determination of whether $\pi - \psi_{z0} - \text{inc}_z < \psi_z < \pi - \psi_{z0} + \text{inc}_z$. If the answer to decision box 302 is affirmative, then SOP control system 10 returns to normal mode, as is represented in operation box 306. If the answer is negative, then SOP control system 10 reassigns a new value to ψ_z , as is represented in operation box 290, and continues through lower reset mode, as shown in the flow chart of Fig. 11.

In the reset modes described in connection with Figs. 10 and 11 and equations (5) through (8), θ_p and θ_y are calculated as a function of ψ_z as ψ_z is reset from ψ_{z0} to $\pi - \psi_{z0}$. Alternatively, equations (5) through (8) may be solved as a function of θ_y , in which case, ψ_z and θ_p would be calculated in terms of θ_y .

In the preferred embodiment, the SOP of local signal 36 is altered by SOP controller 28 and compared with input signal 12. Alternatively, SOP controller 28 may be arranged to alter the SOP of input signal 12. In this case, the altered SOP of input signal 12 would be compared with unaltered local signal 36. In the alternative configuration, the order of retarders 40, 42, and 44 would be reversed since the system is reciprocal.

It will be obvious to those having skill in the art that many changes may be made in the above described details of the preferred embodiment of the present invention without departing from the underlying principles thereof. The scope of the present invention should be determined, therefore, only by the following claims.

Claims

1. An optical system in which a detector (22) develops a difference signal ($\delta\omega$) indicative of a difference between a first polarization state of an input optical signal (ω) and a second polarization state of a local source optical signal ($\omega + \delta\omega$) characterised in that it comprises; polarization control means including three separately operable liquid crystal devices (40, 44) for controlling the difference between the first polarization state of the input optical and the second polarization state of the local source optical signal; and signal processing means (24) responsive to the difference signal for computing polarization data to which the liquid crystal devices of the polarization control means respond to minimise the difference between the first and second polarization states, whereby the polarization control means and the signal processing means cooperate to provide tracking of the first polarization state so that there is a determinable difference between them.
2. A system according to Claim 1, characterised in that the optical system is a communication system.
3. A state-of-polarization control system for an optical system in which a detector (22) develops a difference signal ($\delta\omega$) indicative of a difference between a first polarization state of a first optical signal (ω) and a second polarization state of a second optical signal, ($\omega + \delta\omega$) characterised in that it comprises polarization control means including first, second, and third retarding devices (40-44) for controlling the difference between the first polarization state of the first optical signal and the second polarization state of the second optical signal; and signal processing means (24) responsive to the difference signal for computing polarization data to which the retarding devices of the polarization control means respond to minimise the difference between the first and second polarization states.
4. A system according to Claim 3, characterised in that the second optical signal propagates through the first and second retarding devices, and the first and second retarding devices are of the variable optical retardation type and respond to the polarization data so that the first retarding device provides a first retardance value within one of plural ranges of retardation values and the second retarding device provides a second retardation value that determines the range within which the first retardation value lies to impart a corresponding polarization direction to the second optical signal propagating through the first and second retarding devices.
5. A system according to Claim 4 characterised in that the second retarding device provides one of relatively few values of retardation to determine the range within which the first retardation value lies, and the first retarding device provides one of relatively many values of retardation to determine the first retardation value within the range.
6. A system according to Claim 4 characterised in that the second retarding device provides two values of retardation and the first retarding device provides retardation ψ_z where $n\pi < \psi_z < (n + 1)\pi$, where n is any integer, to impart continuous rotation in either of two directions.
7. A system according to Claim 3 characterised in that the third retarding device cooperates with the first and second retarding devices to provide a polarization state ellipticity and tilt control.

8. A system according to Claim 7, characterised in the the first and second retarding devices cooperated to provide linearly polarized light to the third retarding device.

9. A system according to Claim 3, characterised in the the system operates in a normal mode and first and second reset modes, such that in the normal mode the first and second retarding devices function to provide linear polarization and the third retarding device provides a retardance value θ_y , where $n\pi < \theta_y < (n + 1)\pi$ where n equals any integer; in the first reset mode, the first and second retarding devices provide elliptical polarization, and the third retarding device resets from a retardance value of $(n + 1)\pi$, where n is the integer used in normal mode; and in the second reset mode, the first and second retarding devices provide elliptical polarization, and the third retarding device provides a retardance value of $n\pi$, where n is the integer used in normal mode.

10. A system according to Claim 3, characterised in that during a normal mode of operation of the system, the first retarding device provides a retardance ψ_z , and the second retarding device provides a retardance $\theta_p = (4n_1 \pm 1)\pi/2$, where n_1 is any integer, whenever $n_2\pi < \psi_z < (n_2 + 1)\pi$, where n_2 is any integer.

11. A system according to Claim 3, characterised in that the first retarding device provides a retardance of value ψ_z and the third retarding device provides a retardance θ_y and the polarization data are electrical signals that cause an incremental change in the value of ψ_z and an incremental change in the value of θ_y .

12. A system according to Claim 3, characterised in that the polarization control means and the signal processing means cooperate to provide tracking of the first polarization state so that there is a determinable difference between them.

13. A system according to Claim 3, characterised in that the optical system is a communication system.

14. A system according to Claim 3, characterised in that the first, second, and third retarding devices are liquid crystal devices.

15. A method for controlling the retardation of liquid crystal devices (40-44) characterised in that it comprises the steps of: defining a first polarization state of a first optical signal (ω); receiving a difference signal ($\delta\omega$) indicative of a difference between the first polarization state and a polarization state of a second optical signal ($\omega + \delta\omega$); generating retardation signals that represent a change in the polarization state of the first optical signal from the first polarization state to a second polarization state in response to the difference signal; and adjusting the retardation of the liquid crystal devices in response to the retardation signals.

16. A method for controlling the polarization of a first optical signal of an optical system, characterised in that it comprises the steps of: generating the first optical signal ($\omega + \delta\omega$); propagating the first optical signal through retarding devices (40-44); defining a first polarization state of the first optical signal; receiving a second optical signal (ω) having a polarization state; combining the second optical signal with the first optical signal on a detector (22); generating from the detector a difference signal ($\delta\omega$) indicative of a difference between the first polarization state of the first optional signal and the polarization state of the second optical signal; generating retardation signals that represent a change in the polarization state of the first optical signal from the first polarization state to a second polarization state in response to the difference signal; changing the retardances of the retarding devices in response to the retardation signals; and adjusting the polarization state of the first optical signal propagating through the retarding devices.

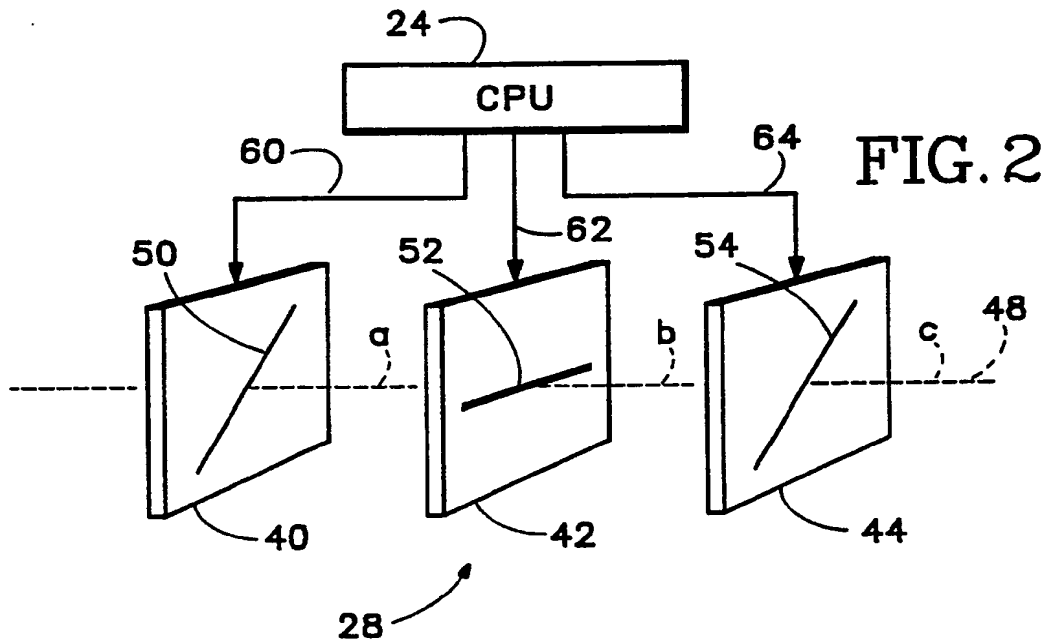
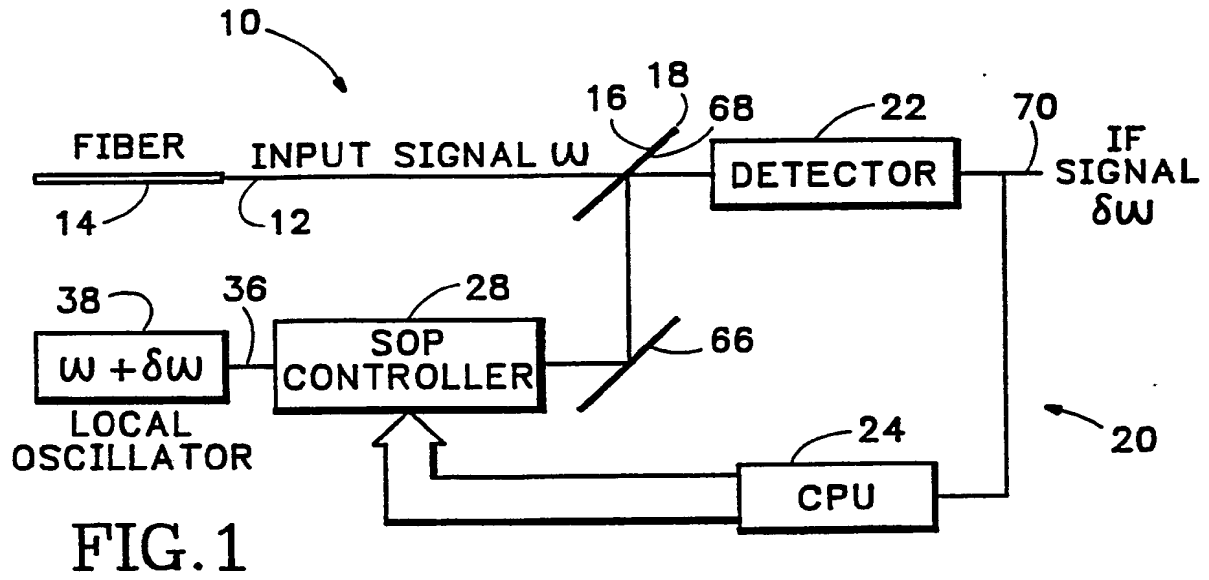


FIG. 3

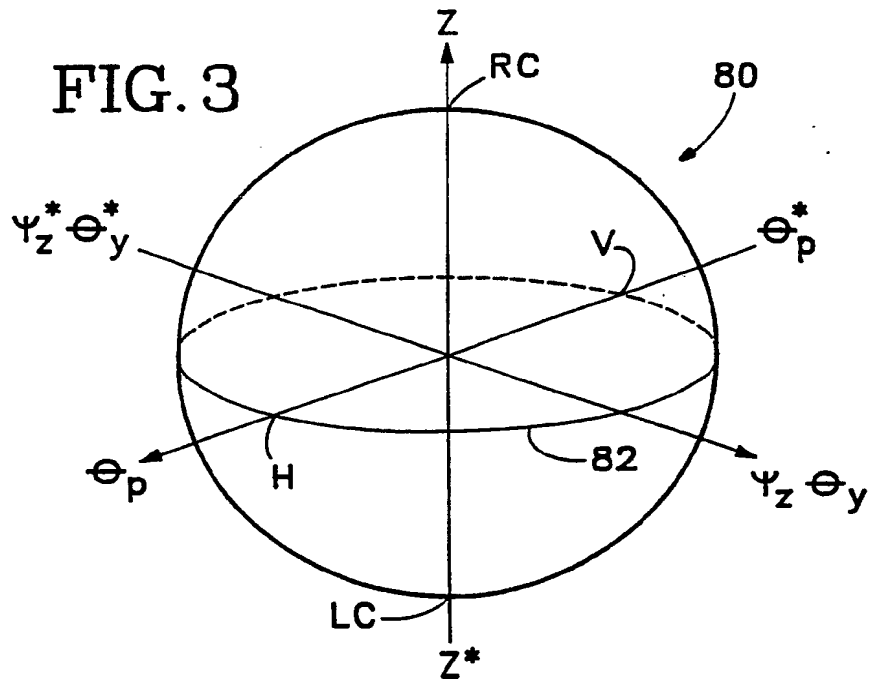


FIG. 4a

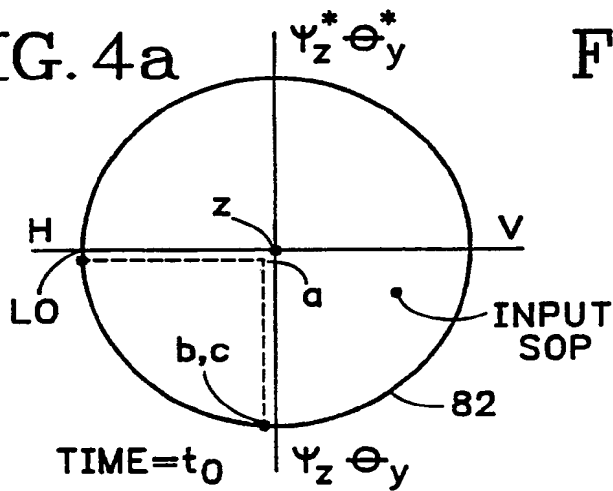


FIG. 4b

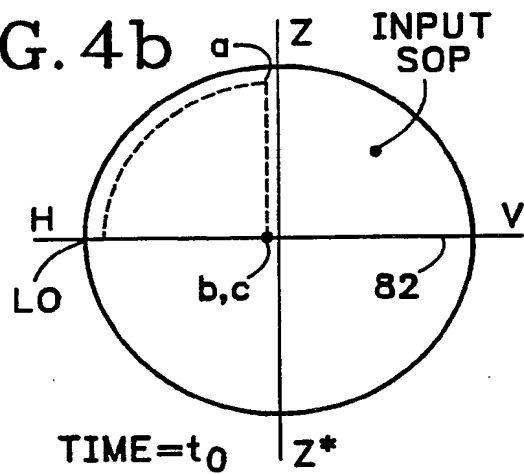


FIG. 5a

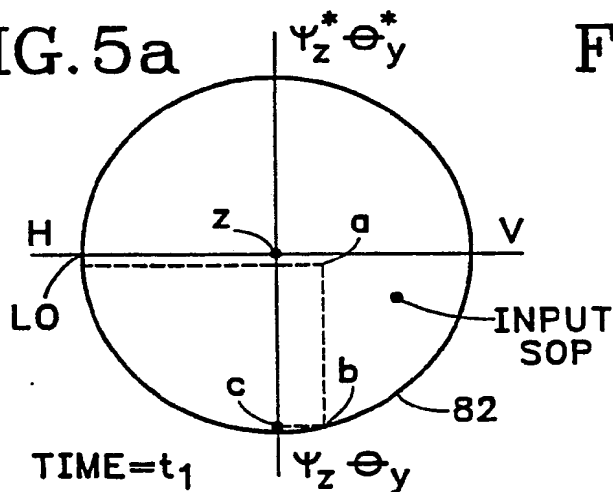
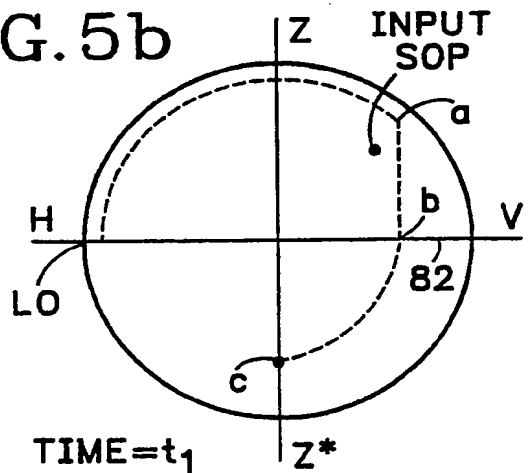
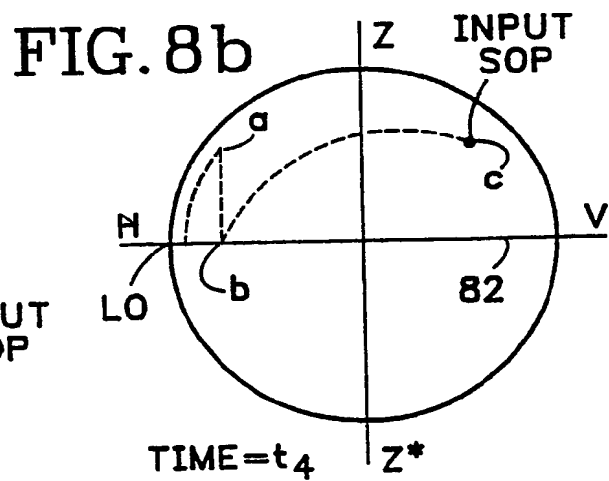
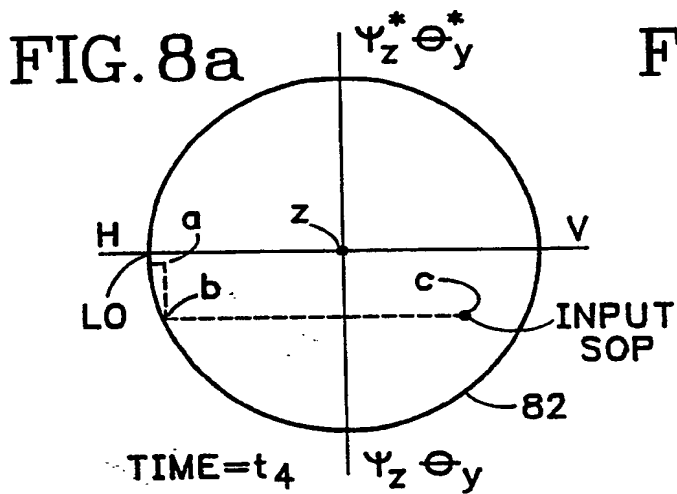
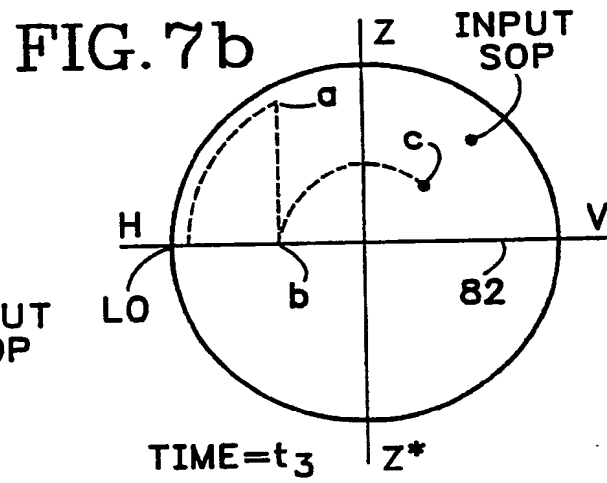
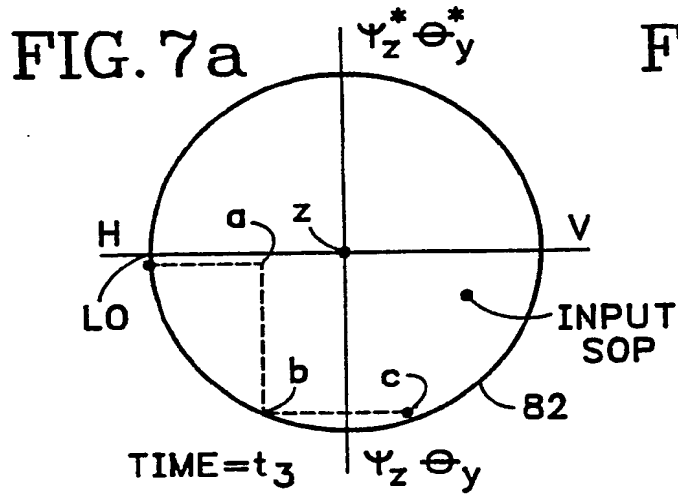
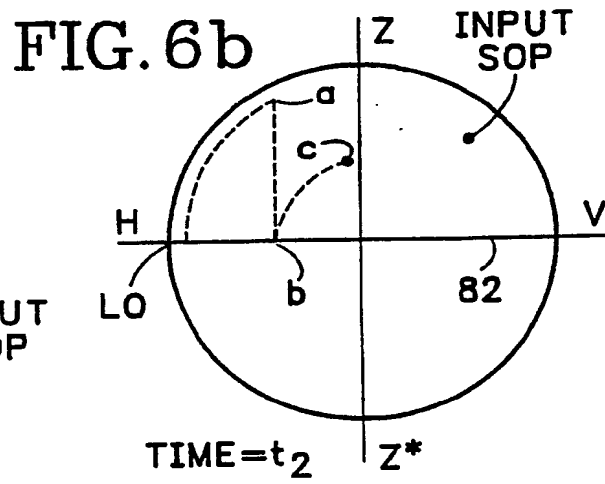
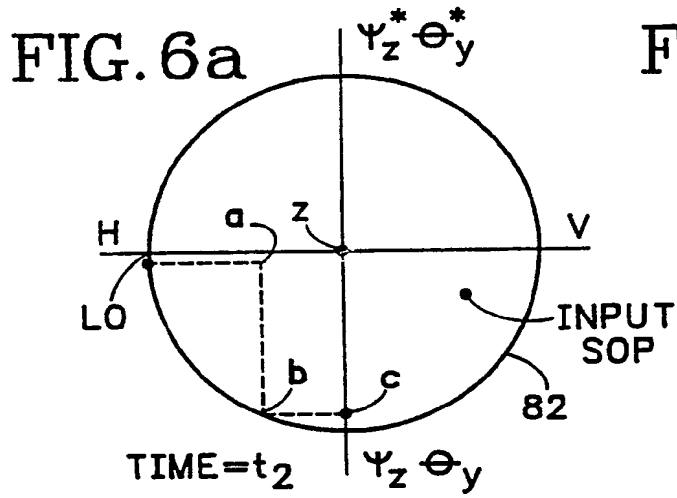
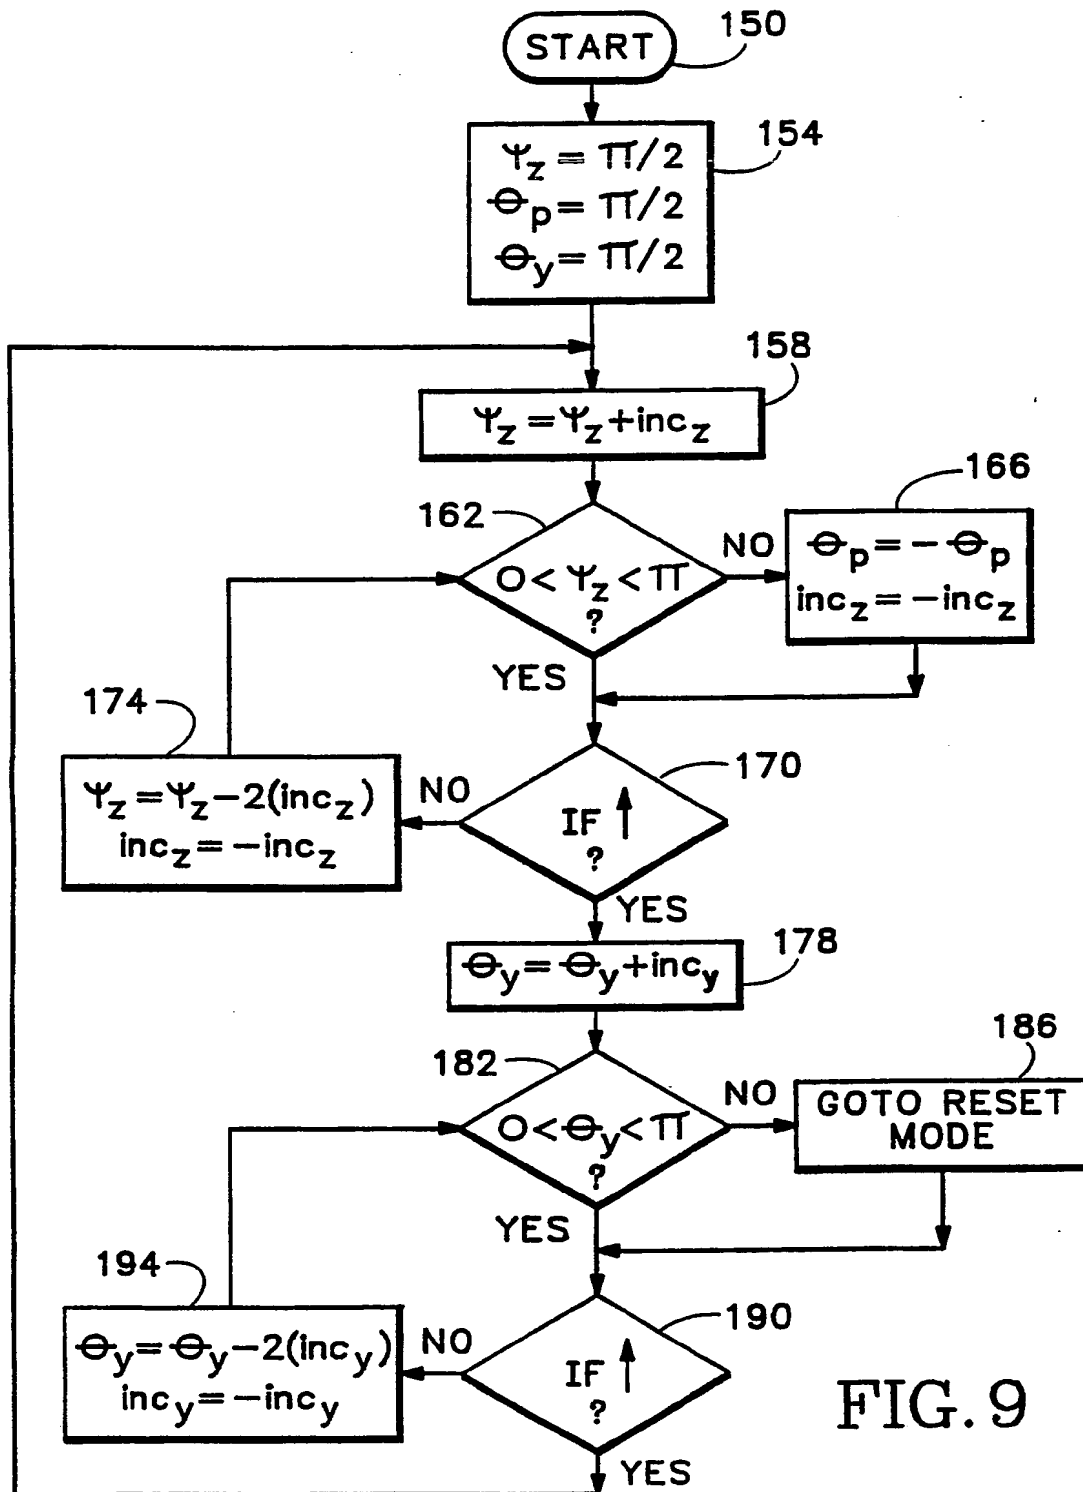


FIG. 5b








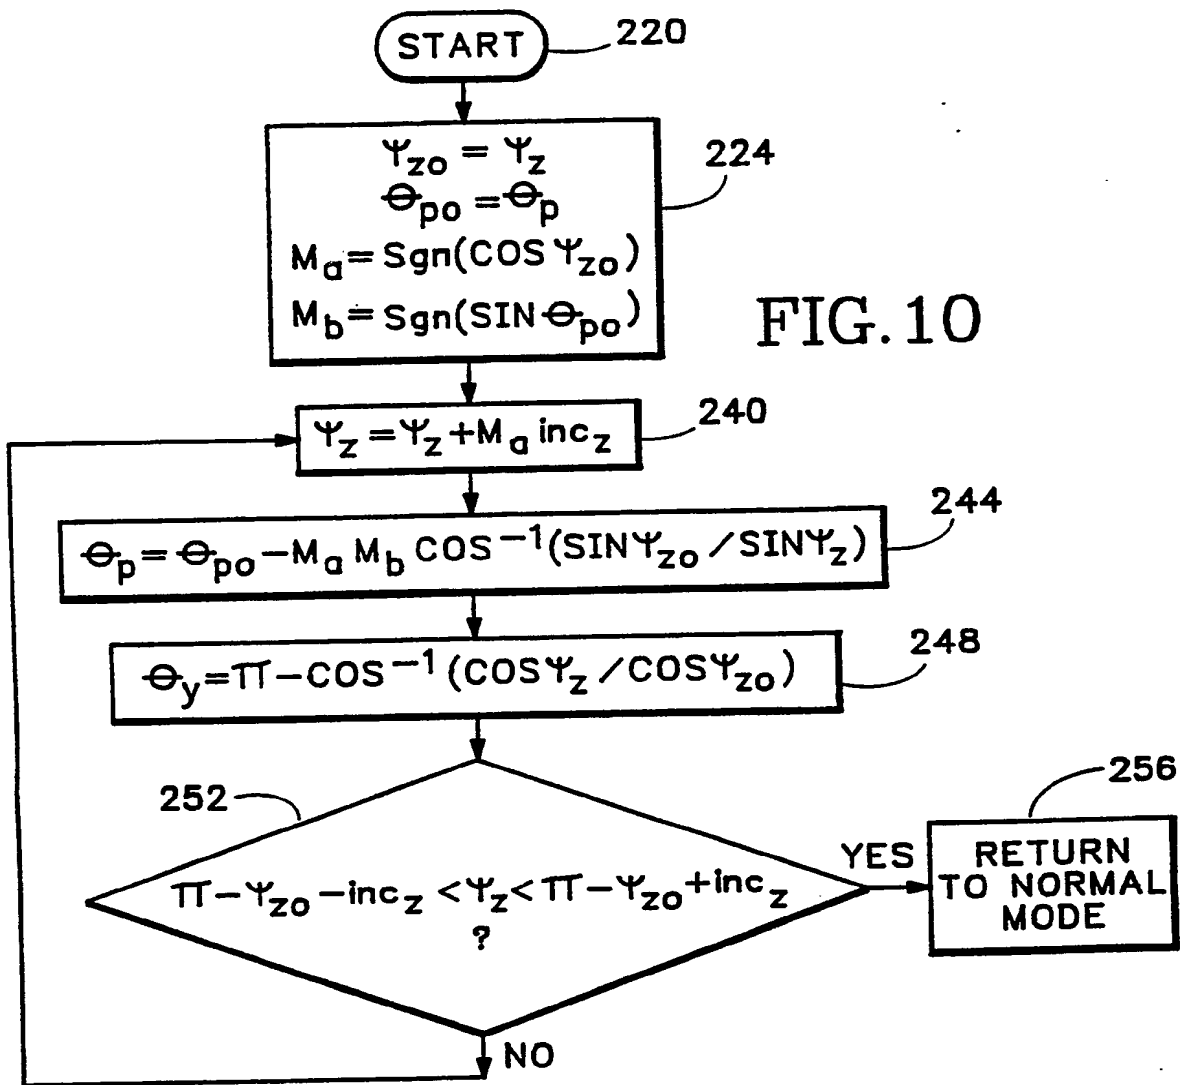


FIG. 11





Europäisches Patentamt
European Patent Office
Office européen des brevets

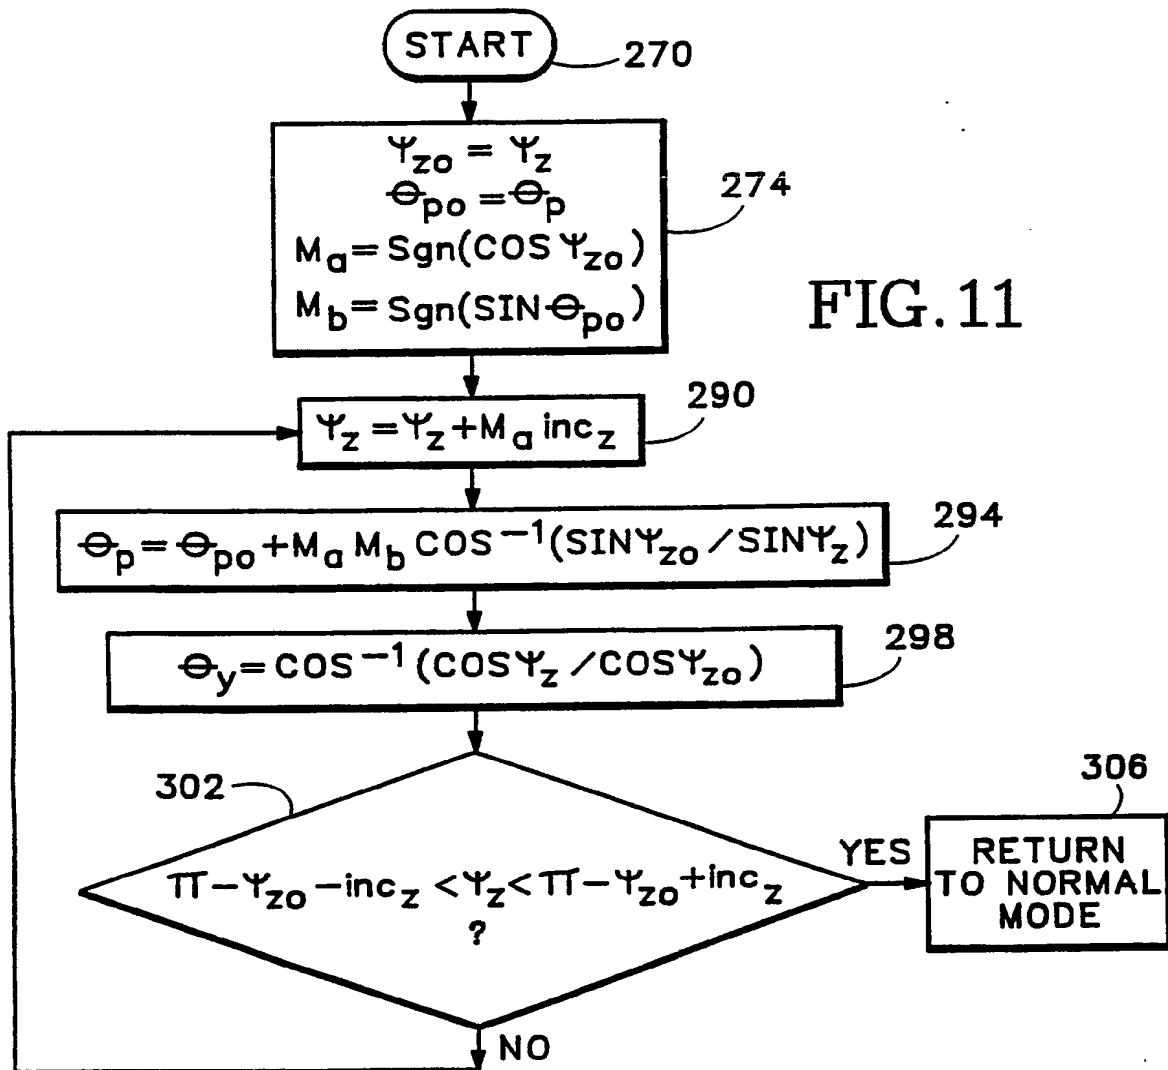

Publication number: **0 393 967 A3**

12

EUROPEAN PATENT APPLICATION

21 Application number: **90304060.8**

51 Int. Cl.⁵: **H04B 10/14, G02F 1/137**

22 Date of filing: **17.04.90**

30 Priority: **17.04.89 US 339281**

43 Date of publication of application:
24.10.90 Bulletin 90/43

64 Designated Contracting States:
DE FR GB NL

98 Date of deferred publication of the search report:
18.12.91 Bulletin 91/51


71 Applicant: **TEKTRONIX, INC.**
Howard Vollum Park 14150 S.W. Karl Braun
Drive P.O. Box 500
Beaverton Oregon 97077(US)

72 Inventor: **Rumbaugh, Scott, H.**
19419 SW Tualamere
Lake Oswego, Oregon 97035(US)
Inventor: **Jones, Michael D.**
4429 SW Tunnelwood
Portland, Oregon 97221(US)
Inventor: **Bos, Philip J.**
15550 NW Perimeter Place
Beaverton, Oregon 97006(US)

74 Representative: **Bryer, Kenneth Robert et al**
Hepworth, Lawrence & Bryer 2nd Floor, Gate
House South Westgate Road
Harlow Essex CM20 1JN(GB)

54 **Polarization controller for use in optical fiber communication system.**

57 A state-of-polarization (SOP) control system (10) uses a SOP controller (28) that is responsive to a CPU (24) to perform endless and complete polarization signal detection for a fiber optic communication system. The SOP controller (28) comprises liquid crystal variable optical retarders (40, 42, and 44) that adjust the polarization state of local optical signal (36) in response to voltages provided by the CPU (24). The CPU (24) adjusts the voltage applied to the retarders (40, 42, and 44) separately in response to the magnitude of an interference signal (70), which corresponds to the degree to which the polarization of the local optical signal (36) and an input optical signal (12) are different.

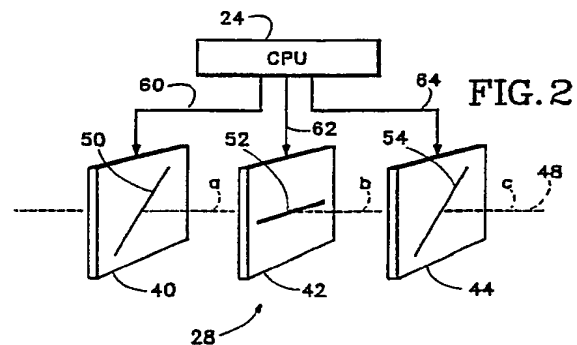

EP 0 393 967 A3



European
Patent Office

EUROPEAN SEARCH REPORT

Application Number

EP 90 30 4060

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
Y	OPTICAL FIBER COMMUNICATION CONFERENCE, Houston, Texas, 6th - 9th February 1989, page 222, abstract no. WQ21; A.S. SIDDIQUI et al.: "Liquid crystal polarization controller for use in fiber communication systems" * The whole document *	1-2	H 04 B 10/14 G 02 F 1/137
X	IDEM -----	15	
Y	EP-A-0 261 724 (N.V. PHILIPS) * Column 4, lines 5-18; column 7, lines 24-45; column 6, line 38 - column 7, line 13 *	1-2	
X	-----	3,4,7,12, 13,16	
X	EP-A-0 248 234 (SIEMENS) * Page 3, line 49 - page 4, line 53 *	3-13,16	
A	PROCEEDINGS OF THE OREGON ACADEMIC OF SCIENCES, vol. 24, February 1988, page 73; S.H. RUMBAUGH et al.: "Endless state of polarization control for coherent optical communication systems liquid crystal" * The whole document *	1-3,13,14	

The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			H 04 B 10 G 02 F 1
Place of search		Date of completion of search	Examiner
The Hague		11 October 91	DIOT P.M.L.
CATEGORY OF CITED DOCUMENTS			
X: particularly relevant if taken alone			
Y: particularly relevant if combined with another document of the same category			
A: technological background			
O: non-written disclosure			
P: intermediate document			
T: theory or principle underlying the invention			
		E: earlier patent document, but published on, or after the filing date	
		D: document cited in the application	
		L: document cited for other reasons	

		&: member of the same patent family, corresponding document	